


Portable Barrier Gate

HM-SHL

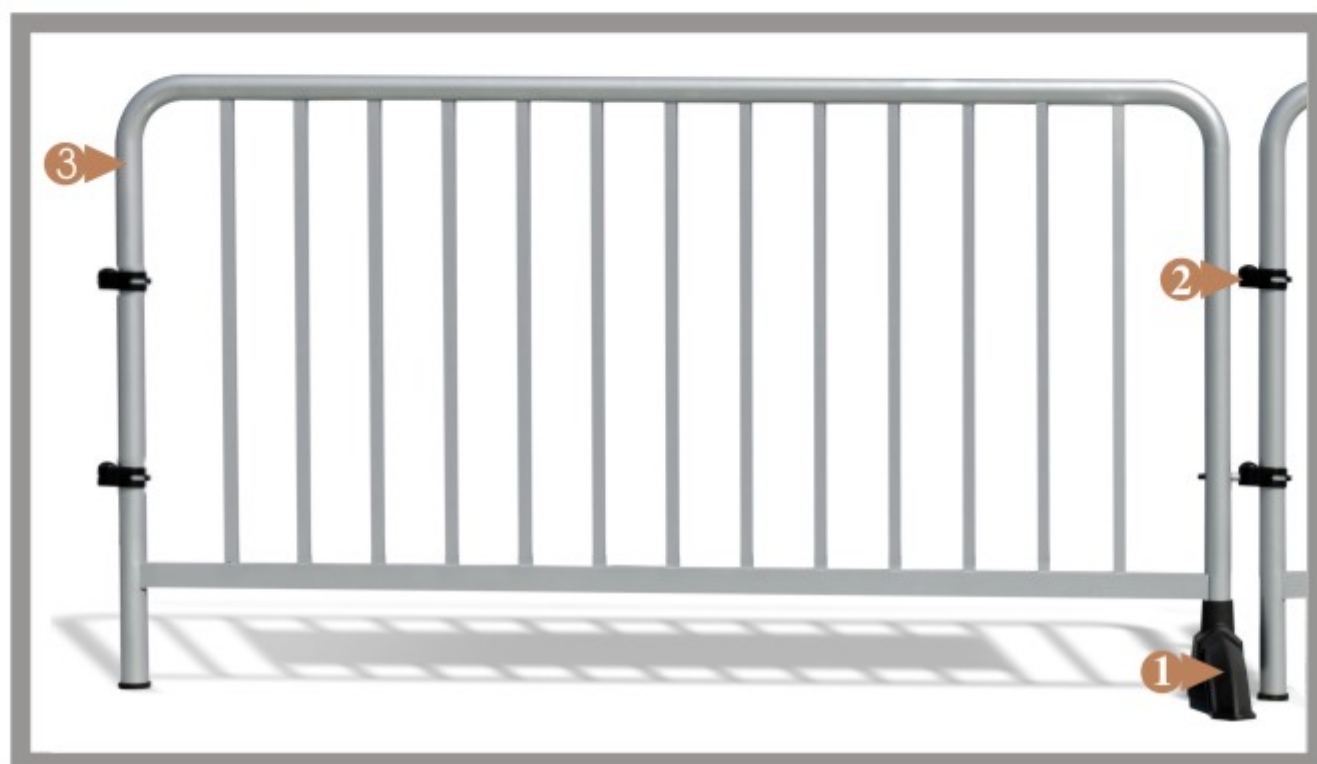

1

Bridge Foot

- Increase the stability of the barrier
- Suitable for use over uneven surfaces
- Removable, easy for storage and transportation



2

Inter-Connector

- Using inserting mechanism by inserting male connector into the other female connector
- Capable to bend 90 degrees



3

Quality Material

- Using high quality aluminum alloy as main frame
- Smooth edges, and safe for all ages and events

HONGMEN ADVANCED TECHNOLOGY CORPORATION

Add: Hongmen Technology Park, Jihua Rd., Buji, Longgang District, Shenzhen CHINA 518129

Tel: +86-0755-89580246 E-mail: globalsales@hong-men.com

Fax: +86-0755-89580295 Website: www.hong-men.com

Advantages of Aluminum Alloys Barrier Gate

- Light weight and portable. (Approx 8.5kg)
- Easy handling and installation friendly
- Strong and sleek design
- Aluminum has all the attributes of metal, which are corrosion resistant, efficient heat transfer, ductile and flexible
- Easy to clean nature as aluminum surface is hard and smooth
- Cost effective!


Packaging

1	Palletized at 14 sets of barrier for 20GP container (140 units)
2	Palletized at 16 sets of barrier for 40HQ container (320 units)

Remarks:

Each set consist of 2 units of barrier with protection of custom molded Polyethylene EPE Foam.

Product Specification

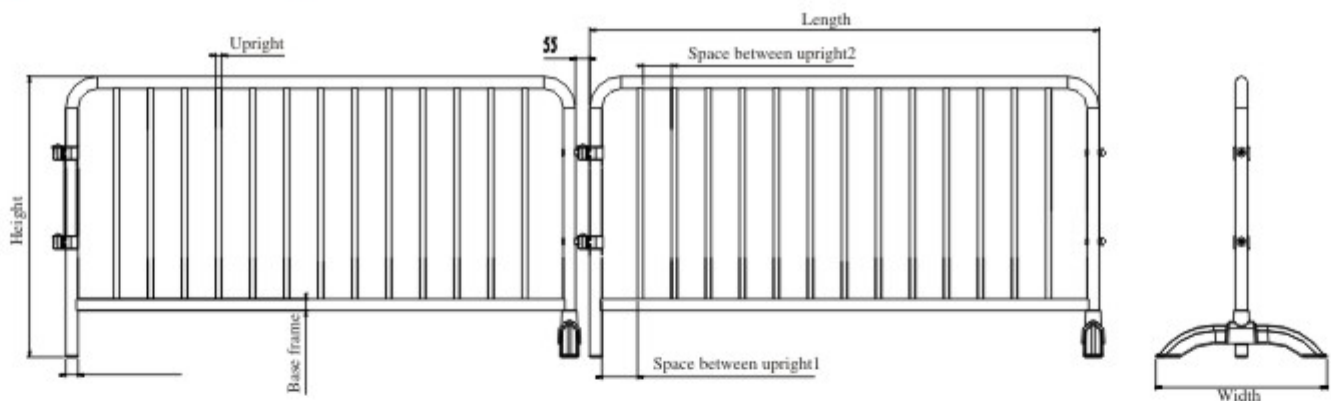

Product specification

Height	Space between connectors	Length	Space between upright1	Space between upright2	Width	Main frame	Upright	Base frame
1100mm	55mm	2000mm	140mm	111.5mm	671.5mm	Φ48*1.3mm	22*22mm	45*32mm

Product Dimension

Length	2.0m(6.56ft)
Height	1.1m(3.60ft)
Number of upright	13
Space between upright	111.5mm(43/8 ")
Frame diameter	485mm(17/8 ")
Frame thickness	1.3mm(16gauge)
Upright spec	22mm*22mm

Material Specification

Main frame	Aluminum alloy(6063-T5)
Bridge foot	PP+20%Fiber
Inter-connector(male)	ABC12(Die-Casting)
Inter-connector(female)	PA66-50%Fiber